

PRODUCT OVERVIEW

**EASY DOT®**




[WWW.NESCHEN.COM](http://WWW.NESCHEN.COM)

## EASY DOT® MAKES THE DIFFERENCE

Neschen, creator of dot adhesive technology, explains that not all dots are created equal.

- Precisely formulated dot pattern with consistent and even distribution
- The size, positioning and spacing of the dots maximizes bubble free installation, adhesive performance and reduced visibility of the dots
- The original easy dot® has a double-sided PE coated liner, which delivers best in class lay flatness properties
- Perfect printing and plotting results
- Solvent-free adhesive
- Residue-free removal
- easy dot® quality films put an end to printing problems with latex inks (occurring with many other PVC films)
- Largest range of PVC-free dot products to help you reduce your impact on the environment

**Special PVC, PP or PET film** for best printability with the highest possible fire rating

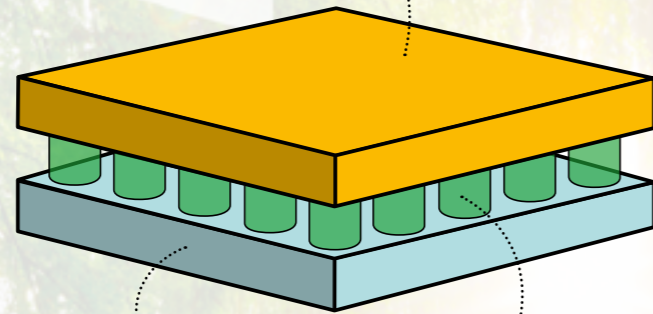

**Stable PE release liner** for superior lay flatness

**easy dot® adhesive** evenly distributed, guaranteeing a bubble-free application



**OFTEN IMITATED, NEVER SURPASSED.**  
WHEN USING DOT ADHESIVE – CHOOSE THE ORIGINAL!

What's the point of using a dot-shaped adhesive? It's simple, installation is so quick and easy, almost anyone can do it.

### EASY DOT® PRINCIPLE

Air bubbles are completely eliminated, as air naturally escapes through the channels created by the dot adhesive. Any trapped air is simply pushed out. This way a high-quality installation can be achieved quickly without water or special tools, even by laymen. Saving time and money.

### TYPICAL APPLICATION

The perfect solution for short-term campaigns on windows, walls, and floors at point of sale, events, trade shows, mass transit etc.

### TRANSPARENT FILMS

They can be reversed printed and installed on the inside of the window facing outwards. A mirror printed image backed up with a white layer (white ink / white lamination film, e.g., the PP matt backing) creates an even more brilliant impression vibrant, impactful image.



PRODUCT OVERVIEW EASY DOT®



PRODUCT	TECHNICAL DATA							APPLICATIONS				PVC-free	INK TECHNOLOGY						CERTIFICATES			
	Thickness (µm)	Weight (approx. g/m²)	Liner	106,7 cm	137,2 cm	160,0 cm	250 m roll	Exterior / Outdoor	Window Graphics	Floor Graphics	Flat Surfaces		Latex	UV	LED UV	UVgel	Solvent	Waterbased	EN 13501	M1	Slip Resistance	
<b>solvoprint® easy dot® matt</b>	100	135	PE-paper	•	•	•	•	•	•		•	•	•	•	•		•	•		•		
<b>solvoprint® easy dot® glossy</b>	100	135	PE-paper	•	•	•	•	•	•		•	•	•	•	•		•	•		•		
<b>solvoprint® easy dot® whiteout</b>	100	135	PE-paper	•	•	•	•	•			•	•	•	•	•		•			•		
<b>solvoprint® easy dot® 180</b>	180	250	PE-paper	•	•						•	•	•	•	•							
<b>solvoprint® easy dot® clear</b>	100	125	PE-paper	•	•	•	•		•		•		•		•		•			•		
<b>solvoprint® easy dot® transparent</b>	100	125	PE-paper	•	•	•	•		•		•		•		•		•			•		
<b>solvoprint® easy dot® red / black</b>	100	122	Glassine		•				•		•	•	•		•							
<b>UVprint PP easy dot® matt</b>	90	90	Glassine		•	•	•	•	•		•		•	•	•					•		
<b>easy dot® PET matt L-UV</b>	75	83	PE-paper		•	•		•	•		•		•	•	•					•		
<b>UV dot print'n'walk®</b>	200	254	PE-paper	•	•	•				•	•	•	•	•			•		R9			
<b>easy dot® Chalkboard black / green</b>	180	215	PE-paper		•						•	•	•		•							

**NESCHEN COATING GMBH**

Hans-Neschen-Str. 1  
31675 Bückebug, Germany

**T** +49 (0)5722 2070

**E** info@neschen.de

**www.neschen.com**



03/25



**WWW.NESCHEN.COM**