

TEST CERTIFICATE

Determination of the anti-slip property of floor coverings in workrooms and fields of activities with slip danger

Tested material: **Plastics**

Kind of material: printable textured PVC used for Floors,
Walls & Windows

Article description: TRIFECTA

Dimensions: roll size = 1372 mm x 30,5 m;
thickness = 150 micron
(test specimen: 1000 x 500 x 0,15 [mm])

Colour: white

Surface: according to specification: textured / embossed
(even, fine raw)

Producer/supplier: Nekoosa Holdings Inc.
841 Market St, Nekoosa
WI 54457
United States of America

Client: The iC GROUP
Groendreef 35
9880 Aalter
BELGIUM

Certificate No.: 92302001.001e

Test date: 26.11.2020

Sampling: Sent by the customer to the research institute


Test method: **DIN 51130** (edition 02/2014)
"Testing of floor coverings - Determination of the anti-slip property -
Workrooms and fields of activities with slip danger - Walking method
- Ramp test"
The sample flooring was delivered in a testable surface condition.

Test result: Average total acceptance angle: **18,8°**

Assessment: **Classification group of anti-slip property: R10**

SÄUREFLIESNER-VEREINIGUNG E. V.
Institut für Wand- und Bodenbeläge
Managing Director


Dipl.-Ing. Friedrich Höltekemeyer

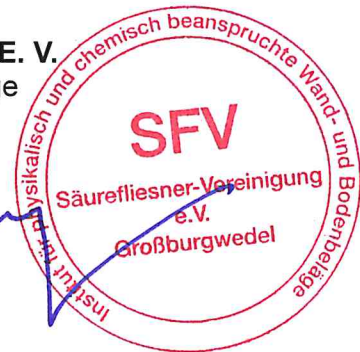

Großburgwedel, 01.12.2020
Schu/ed

This test certificate is valid as long as there is no change in the above mentioned test-basis - for products which are identical to the test specimen. The certificate is given for 5 years (starting from test date). Publication and reproduction of this certificate is only allowed in unabridged form.



– Institut für Wand- und Bodenbeläge –
SÄUREFLIESNER-VEREINIGUNG E.V.

Im Langen Felde 4, 30938 Burgwedel · Telefon (051 39) 99 82-0 · Telefax (051 39) 99 82-40 · E-Mail: info@saeurefliesner.de
Nach DIN EN ISO/IEC 17025 durch die DAkKS akkreditierte Prüfstelle. Die Akkreditierung gilt für die in der Urkunde D-PL-18372-01-00
aufgeführten Bereiche. Vom DIBt nach LBO unter der Kenn-Nr. NDS 20 anerkannte und nach EU-BauPVO notifizierte Stelle NB 1212.

